



## FP-12™ SOFFIT



### FEATURES

- 24 gauge AZ50 steel panel
- 12" wide coverage with lengths up to 30'-0" (lengths over 15' requires bead)
- Available with beaded or flush (non-beaded) surface
- Concealed fastener system

### BENEFITS

- Ideal panel for soffit applications
- Provides an attractive, architectural appearance when a smooth finish is desired
- Available in five standard colors to complement your building
- Concealed fasteners provides secure, attractive installation

# FP-12™ SOFFIT

Provides an attractive, architectural appearance for buildings, entrances, and covered walkways

FP-12, a concealed-fastener panel, offers a high quality and low maintenance option for providing a smooth, flush appearance on your building. Manufactured to install easily, the FP-12 panel incorporates a hidden fastener attachment and advanced side joint design. The panel can be installed over open framing and offers superior wind disengagement resistance performance. Also, the 7/8" profile depth of panel allows for field application of sealant, if required for the installation.

These 12" wide panels are available in lengths from 1' to 30' with beaded profiles required on lengths over 15'. FP-12 can be rolled in a selection of profile appearances including:

- Smooth face (12" flat)
- One stiffening bead (6"/6")
- Two stiffening beads (4"/4"/4")

FP-12 is available in standard 24 or 26 gauge; PVDF finish and offered in the colors shown below.

Panel Width: 12" coverage  
Panel Length: Min. 1' Max. 30' with beads\*  
Gauges: 24 ga.  
Substrate: AZ50  
Exterior Coating: KXL (70% PVDF)  
Interior Coating: Gray primer  
Ext. Coat Warranty: 25 yrs. conditional†  
Finish: Smooth  
Profile: Flush or beaded

For information about this or any other VP product or service, contact your local authorized VP Builder.


*Note: All panels formed from light gauge metal may exhibit waviness, also known as "Oil Canning," commonly occurring in, but not restricted to, flat portions of a panel. This inherent characteristic is not a defect of material or manufacturing and is not cause for rejection.*

*FP-12 finishes meet Kynar 500 and Hylar 5000 specifications.*


• Kynar 500® is a registered trademark of Arkema.

• Hylar 5000® is a registered trademark of Solvay Solexis.


\*Beaded profiles required on lengths over 15'

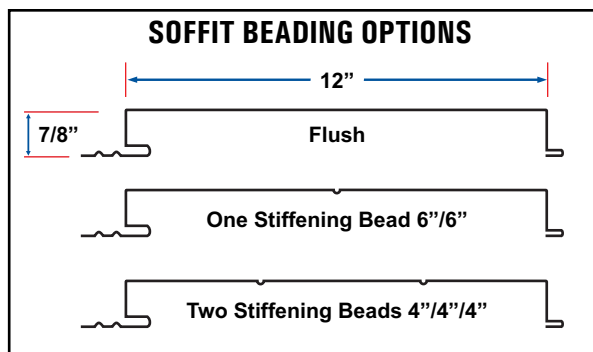

Cool Egyptian White

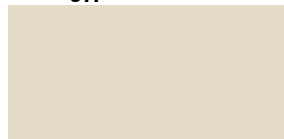

Cool Cotton White



Cool Granite Gray



Cool Sierra Tan



Cool Dark Bronze



Varco Pruden Buildings, 3200 Players Club Circle, Memphis, TN 38125

©All rights reserved. Varco Pruden Buildings® is a division of BlueScope Buildings North America, Inc. Varco Pruden meets or exceeds the most comprehensive testing and compliance standards in the building system industry. To learn more about our products, services and qualifications, visit our website, [www.vp.com](http://www.vp.com). **Building Solutions... one relationship at a time.**

2049 FP-12 Soffit  
Issue Date: 2001  
Revised: 10/16