



## THERMALIFT™ INSULATION SYSTEM

# INSULATION SYSTEMS



### FEATURES

- Unique insulation bridge allows more space for insulation
- Meets more stringent energy codes
- Compatible with VP SSR roof system
- Four sizes of clips for varying insulation thickness: 3½", 4", 4½" and 5" tall
- Cost effective to install and maintain
- Installs above secondary framing

### BENEFITS

- Provides higher thermal performance for year-round comfort and energy efficiency
- Achieves compliance in climate zones with high thermal demand
- Provides energy performance and long-term weather protection backed by warranties
- Saves building owners money on initial construction and over the life of the structure
- Additional clearances and clean appearance overhead

# THERMALIFT™ INSULATION SYSTEM

Higher Thermal Performance – Lower Cost

Optimize energy efficiency with VP's ThermoLift™ Insulation System. Featuring the unique insulation bridge design, ThermoLift allows for more insulation to be installed above the structural secondary. Thermal performance testing in accordance with ASTM-C1363 has resulted in U-factors as low as 0.029. The result is a cost-effective roof system that meets today's more stringent energy codes, including IECC 2015 and Canada's NECB 2011 code.


Developed to work with VP's SSR Standing Seam Roof system, ThermoLift includes a proprietary 5"x48" insulation bridge (patent pending) to provide additional space for insulation between the roof panels and the building structure. Made from sturdy 22 gauge galvanized steel, the bridge, when combined with VP's SSR clip offerings, lifts roof panels by up to 7" above the secondary structural creating enough space for two layers of blanket insulation for an U-factor performance as low as 0.029. As part of the complete system design, the insulation bridge also helps to maintain panel alignment for efficient installation and an attractive finished roof.

VP's ThermoLift insulation system is compatible with a variety of structural options including purlins, WideBay Trussed Purlins™ and bar joist. Engineered to be installed above the building structure, ThermoLift eliminates the need for banding, and reduces installation time and costs when compared to other alternatives. Additionally, once the roof is installed, structurals are accessible to other trades for attaching items such as duct work and sprinkler systems. ThermoLift works with Sky Web II™ to provide additional protection for workers during construction.

ThermoLift is compatible with VP's PrisMAX™ SL daylighting product, DuraCurb™ and roof accessory items. For complete information about the benefits of ThermoLift on your project, talk with your authorized VP Builder.



THERMALIFT WITH WIDEBAY TRUSSED PURLINS

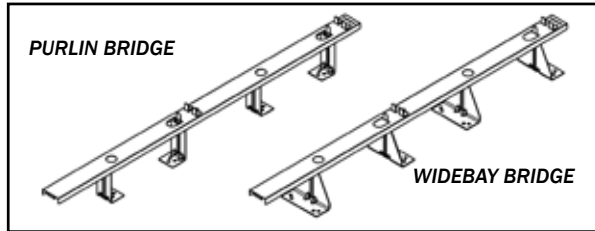

Specially designed bridging pieces provide stability and modularity for use with standard purlins or VP's WideBay Trussed Purlins.

ThermoLift Assembly	Insulation	U-Factor	R-Value <sup>‡</sup>
Bridge w/o Thermal Block	(R16* + R19 <sup>†</sup> )	0.032	31.3
Bridge w/o Thermal Block	(R19* + R25 <sup>†</sup> )	0.030	32.9
Bridge w/Thermal Block	(R19* + R30 <sup>†</sup> )	0.029	34.0

<sup>‡</sup>-Effective R-Value \*--Faced; <sup>†</sup>--Unfaced



Varco Pruden Buildings, 3200 Players Club Circle, Memphis, TN 38125

©All rights reserved. Varco Pruden Buildings® is a division of BlueScope Buildings North America, Inc. Varco Pruden meets or exceeds the most comprehensive testing and compliance standards in the building system industry. To learn more about our products, services and qualifications, visit our website, [www.vp.com](http://www.vp.com). **Building Solutions... one relationship at a time.**

2071 ThermoLift  
Issue Date: 2016  
Revised: New