





# V A R C O P R U D E N B U I L D I N G S

## STANDARD WALL, TRIM & ROOF COLORS


Cool Arctic White



Cool Cotton White

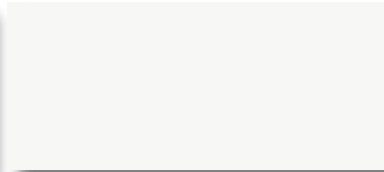


Cool Egyptian White

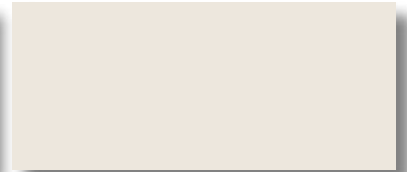

Cool Sierra Tan



Cool Granite Gray

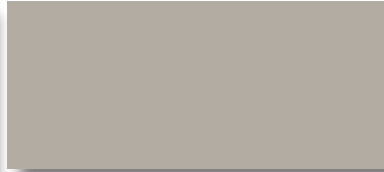


Cool Zinc Gray



Cool Straw Gold



Cool Dark Bronze



Cool Colonial Red



Cool Hemlock Green



Cool Leaf Green



Cool Bermuda Green




Cool Cobalt Blue



Cool Imperial Blue



Cool Ebony (trim only)

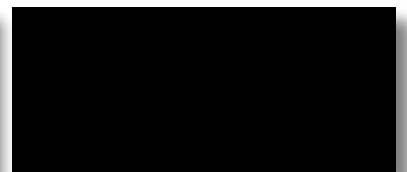

Acrylic Coated Galvalume\*



COLORS & FINISHES

Wall panel colors for Panel Rib, RPR, Tech Four & Vee Rib. Roof panel colors for Panel Rib Roof and SSR.

Liner panel colors are limited to 24 & 26 gauges. 22 & 28 gauge liner is available in Polyester Interior White finish.

For SLR II colors, see selection card #6020. \* Acrylic Coated Galvalume is only available for roof panels & Deck-Liner.



# STANDARD WALL, TRIM & ROOF COLORS

Long-term beauty, unmatched protection, cool color performance and superior quality.

Varco Pruden uses high quality paint systems designed to provide long-term performance and protection. Each coating is formulated with thoroughly researched, tested and field proven pretreatments, primers, resins and pigments that can meet your design and performance requirements.

This paint system combines ceramic pigmentation with polyvinylidene fluoride for superior, long-lasting performance. PVDF finishes are respected for their durability, resistance and color retention. Our XXL finishes are warranted for up to 25 years.

70% PVDF finishes meet both Kynar 500 and Hylar 5000 specifications. Kynar 500® is a registered trademark of Arkema. Hylar 5000® is a registered trademark of Solvay Solexis. Galvalume® is a registered trademark of BIEC International, Inc.

Custom color matching is available through Varco Pruden. Orders with custom colors are subject to special pricing and delivery considerations.

All colors shown approximate paint colors as accurately as possible. Actual paint colors may vary. Colors in this guide are for reference only. Varco Pruden Buildings reserves the right to change color offerings shown here without notice. Painted metal samples are available.

*Note: All panels formed from light gauge metal may exhibit waviness, also known as "Oil Canning," commonly occurring in, but not restricted to, flat portions of a panel. This inherent characteristic is not a defect of material and is not cause for rejection.*

PHYSICAL AND PERFORMANCE PROPERTIES ON COATED STEEL <sup>1</sup>		
Specular Gloss at 60°	ASTM D 523 <sup>(2)</sup>	25-35
Pencil Hardness	ASTM D 3363	F-2H
T-Bend <sup>(3)</sup>	ASTM D 4145	2T; No pick off
Adhesion	ASTM D 3359	Reverse impact 1/16" crosshatch; No adhesion loss
Humidity Resistance 100% humidity @ 95° F	ASTM D 2247 ASTM D 714	Passes 1500 hours No #8 blisters
Reverse Impact	ASTM D 2794	3.0 x metal thickness, no cracking or adhesion loss
Salt Spray Resistance 5% salt fog @ 95° F	ASTM B 117	Passes 1000 hours Less than 1/8" avg. creepage from scribe. None or few #8 blisters
South Florida Exposure 10 yrs. @ 45°	ASTM D 2244 ASTM D 4214	Max 5 fade Max 8 chalk
Dry Film Thickness	ASTM D 1400	0.20 mil primer; 0.75 mil topcoat
Acid Resistance	ASTM D 1308	10% muratic acid 24 hours — no effect; 20% muratic acid 18 hours — no effect
Acid Rain Test	Kesternich SO <sub>2</sub>	15 cycles min. DIN 50018, no objectionable color change
Alkali Resistance	ASTM D 1308	10%, 25% NaOH, 1 hour; no effect

1. Includes G90 hot dip galvanized and Galvalume 2. American Society for Testing and Materials. 3. Fracturing or rupturing of substrate will rupture coatings. Heavy gauge and clad steel substrates impose limitations on formability. XXL coatings are generally flexible beyond the point of substrate rupture.

COOL COLOR INFORMATION						
VP's Color Finish Name & Color Code	Initial Solar Reflectance	3 Year Solar Reflectance	Initial Thermal Emittance	3 Year Thermal Emittance	Initial SRI	3 Year SRI
Acrylic Coated Galvalume — no code	0.68	0.62	0.30	0.14	65	46
Cool Arctic White — BN5W183B	0.55	0.55	0.83	0.83	63	63
Cool Bermuda Green — BN5G176B	0.25	0.25	0.83	0.83	22	22
Cool Cobalt Blue — BN5L148B	0.25	0.25	0.83	0.83	22	22
Cool Colonial Red — BN5R143B	0.25	0.25	0.83	0.83	22	22
Cool Cotton White — BN5W184B	0.70	0.70	0.83	0.83	84	84
Cool Dark Bronze — BN5N239B	0.25	0.25	0.83	0.83	22	22
Cool Ebony** — BN5B114B	0.25	0.25	0.83	0.82	22	22
Cool Egyptian White — BN5I137B	0.55	0.55	0.83	0.83	63	63
Cool Granite Gray — BN5A221B	0.55	0.55	0.83	0.83	63	63
Cool Hemlock Green — BN5G175B	0.32	0.32	0.83	0.83	31	31
Cool Imperial Blue — BN5L149B	0.25	0.25	0.83	0.83	22	22
Cool Leaf Green — BN5G174B	0.25	0.25	0.83	0.83	22	22
Cool Sierra Tan — BN5N235B	0.45	0.45	0.83	0.83	49	49
Cool Straw Gold — BN5I136B	0.55	0.55	0.83	0.83	63	63
Cool Zinc Gray — BN5A222B	0.35	0.35	0.83	0.83	35	35

Initial Solar Reflectance Test Method = C1549. Initial Thermal Emittance Test Method = C1371.



Varco Pruden Buildings, 3200 Players Club Circle, Memphis, TN 38125

©All rights reserved. Varco Pruden Buildings® is a division of BlueScope Buildings North America, Inc. Varco Pruden meets or exceeds the most comprehensive testing and compliance standards in the building system industry. To learn more about our products, services and qualifications, visit our website, [www.vp.com](http://www.vp.com). **Building Solutions... one relationship at a time.**

6021 Wall, Trim & Roof Colors  
Issue Date: 1967  
Revised: 4/16